

RGB

LED

-

보급형

RGB 풀컬러 조명

120도 확산



**IP68
실리콘 몰딩**

투사각도 조절



8W (505MM)

16W (1010MM)

고급형

RGB

풀컬러조명



투사각도 조절

60도 집광
120도 확산

IP68 실리콘 몰딩

25W (500MM) 50W (1000MM)

RGB 풀컬러조명



20도
40도
60도
120도

IP68

45W (230Φ)

RGBW 라인바



IP68
100% 완전 방수
RGB 풀칼라

20W (500MM)

40W (1000MM)



RGB

8W 16W 25W 50W,





35W, 45W


구분	주문코드	소모전력	크기 (mm)	배광(각도)	디멘전
24V 바타입	CSB100	8W	505	120도 확산형	A
	CSB200	16W	1010		B
	CFT-100	25W	500	120도 확산형	C
	CFT-110			60도 집광형	
	CFT-200	50W	1000	120도 확산형	D
	CFT-210			60도 집광형	
24V 투광기 타입	CFF301	45W	원형 300 ϕ	20도, 40도 60도, 120도	E
	CFR001	35W Red	사각 283 x 140	60도 집광형, 120도 확산형	F
	CFB001	35W Blue			
	CFG001	35W Green			

파노라마 타입도 주문제작 됩니다.
 # 45W 원형 투광기만 내장 컨트롤러 가능하며 나머지는 외장 컨트롤러 적용
 # 35W R /G/ B는 50W 버전도 있습니다.

구분	주문코드	제품 구분	크기(mm)	배광(각도)	디멘전
RGBW 라인바	CFT300-G	20W	500mm	120°	G
	CFT400-G	40W	1000mm		H


전제품 IP67 또는 IP68입니다. | 전제품 SMPS 별도형
 # RGB 풀칼라
 # PC / 모바일 원격제어 조명제어 (패턴변경 및 밝기제어)

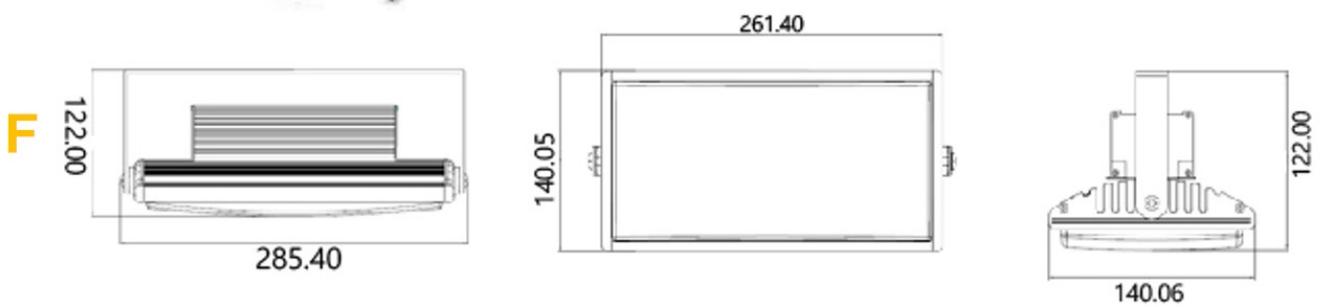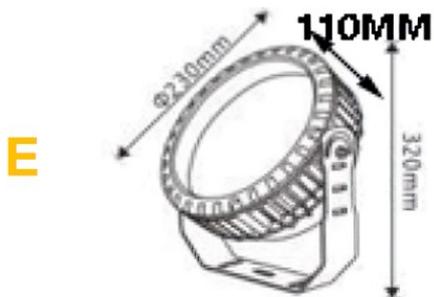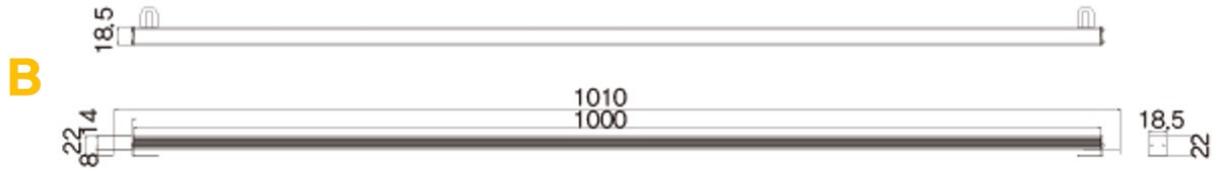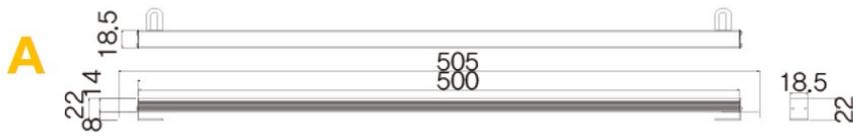

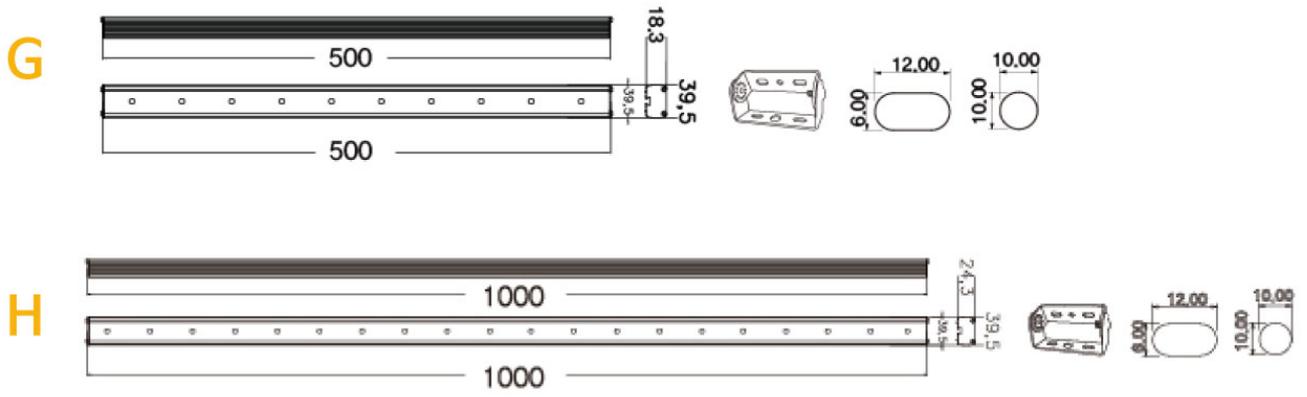


RGBW - [,]

, 가 .
3가 , , 가 .

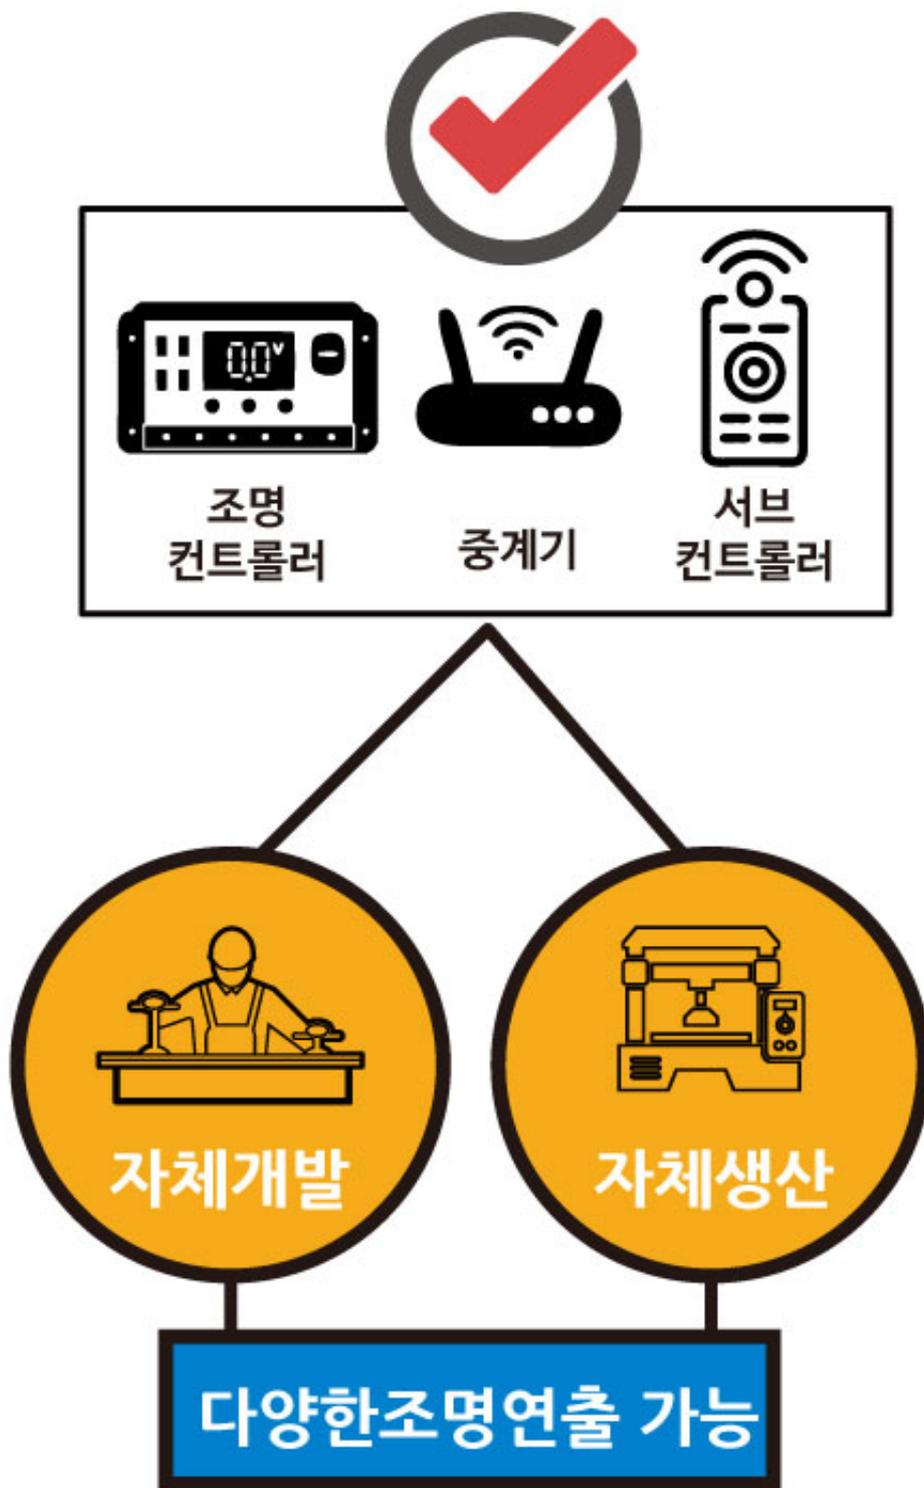



건축
경관

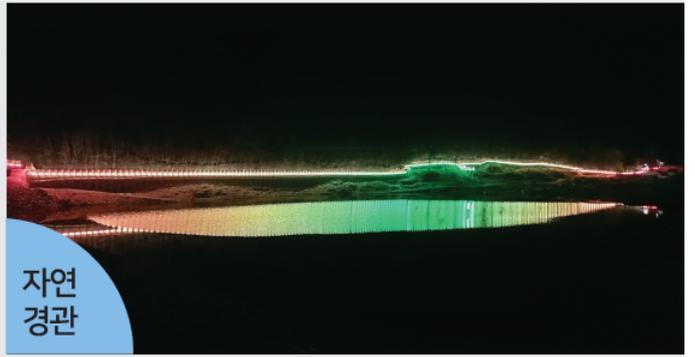

자연
경관



교각
경계



항해
식별

1. -



2. [DMX512 +]-



3. -


가



1. 가

(-) -> LTE -> LTE -> LTE

-> LTE () -> -> -> (-)

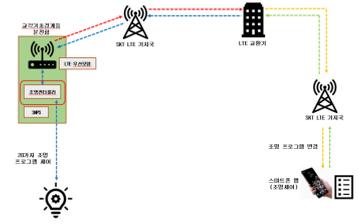

2.

가

3. LED

가 LED

4. 100% ,

IP68. , , 가 가 .

5. (AL6063) & Sus304

- 가 , 가

- , .

AI6063

- AL6063

가

가 가

- Sus304 . 가



6.

- 8 ,
- 60 , , , ,
- 가 가 ,

STELLON

생산물배상책임보험

MERITZ
메리츠화재
1억 원

든든하니까!
믿고 구입하세요!!

이지엠테크
메리츠화재 생산물배상
책임보험 서비스 가입

이지엠테크는 메리츠화재 생산물배상책임 보험에
가입되어 문제가 생길시 **1억 원** 한도내에서 보상해드립니다